


Southwire™

CORD SOLUTIONS CATALOG

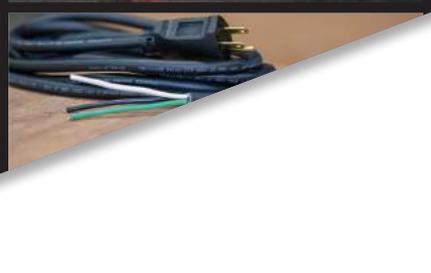

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

SOUTHWIRE.COM

OUR STORY

As a family business, Southwire proudly continues building on our commitment to environmental stewardship and corporate sustainability by prioritizing stakeholder expectations, and supporting the wellbeing of our communities and the environment in which we live. To help us meet this commitment, we organize our sustainability strategy around five core tenets: Growing Green, Living Well, Giving Back, Doing Right, and Building Worth.

We Deliver Power...Responsibly®

We remain committed to the sustainability of our company for the next 100 years and beyond. As we strengthen this commitment, we continue to work hard every day to discover, develop and distribute sustainable solutions that exceed the expectations of our stakeholders around the world.

OUR MISSION

To be a **preferred provider** of solutions to the electrical industry by providing innovative products and services with exceptional quality.

OUR VALUES

Our **ONE Southwire** culture prioritizes the interests of our team members, customers, and communities through a continuous commitment to empowerment, trust, consistency, and inclusion.

OUR REACH

Nearly one in two new homes built in the United States contains our wire, and we produce half of the cable used to transmit and distribute electricity throughout the nation.

OUR PRODUCTS

Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety, and efficiency.

OUR SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle; from our knowledgeable customer service team, to our experienced field sales team, we're there every step of the way.

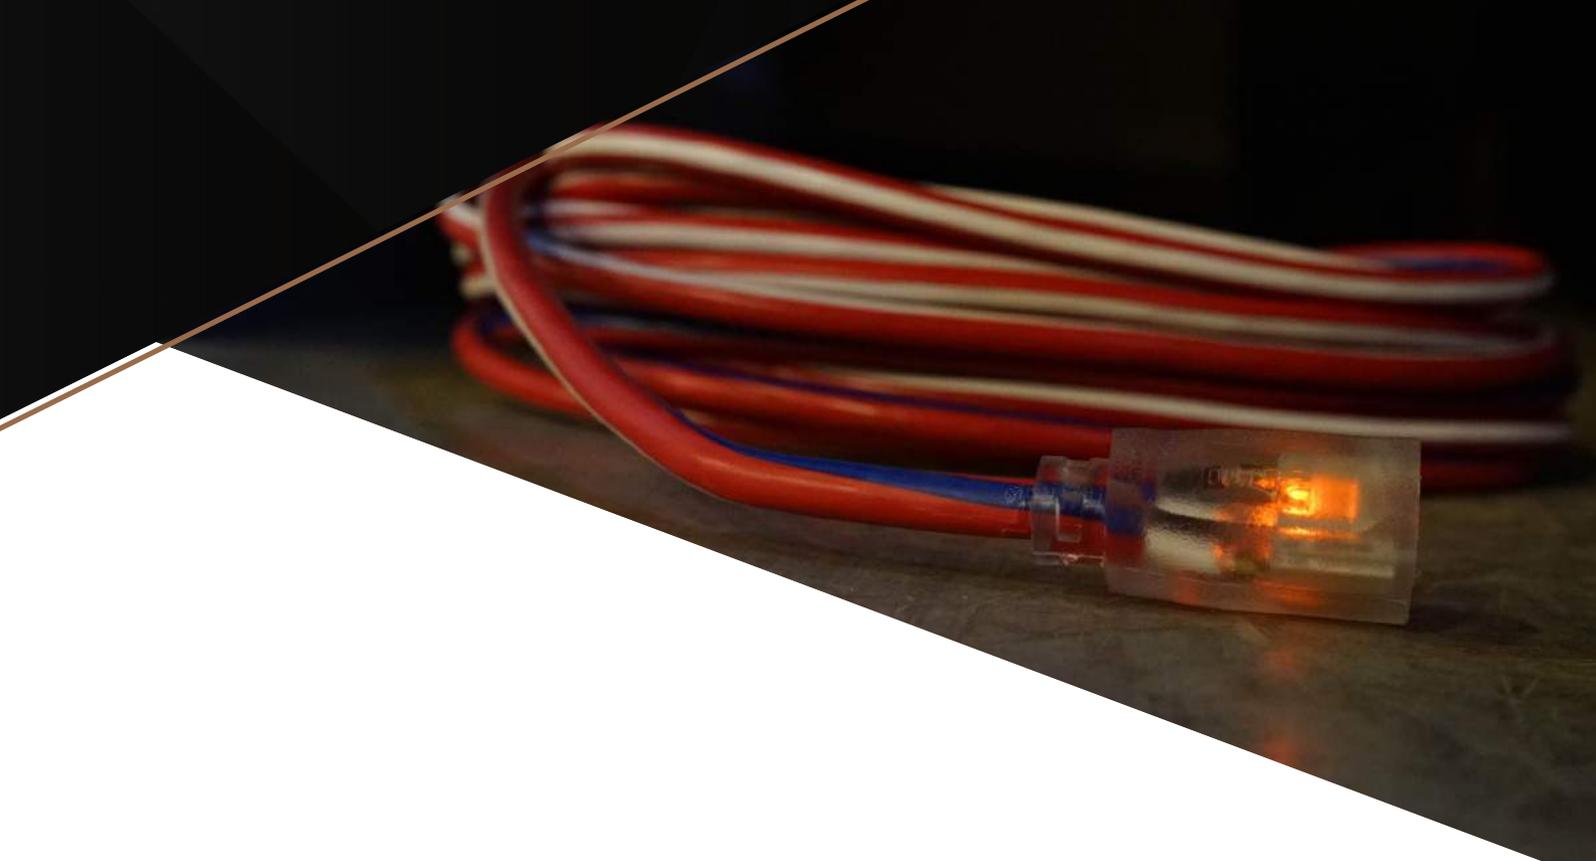


TABLE OF CONTENTS

CUSTOM CORDS

Custom Cord Programs..... 8

OUTDOOR CORDS

Standard 12
Red, White, & Blue 15
Tri-Tap..... 16
20A 5-20..... 18
Heavy Duty..... 19
Multi-Outlet..... 20
Push-Lock..... 21

COLD WEATHER CORDS

Polar Solar® Supreme..... 26
Polar Solar® 27
Cold Flex™ 30

TWIST LOCK & GENERATOR CORDS

Twist Lock..... 34
Generator Adapters..... 35
Twist Lock Adapters..... 36

SPECIALTY CORDS


Royal® Welding Cords 41
Oil Resistant Agripro™ Cords 44

RANGE, DRYER AND APPLIANCE

Range & Dryer 47
Replacement..... 48
Appliance..... 50

CORD MANAGEMENT AND REELS

Storage 52
Reels..... 53

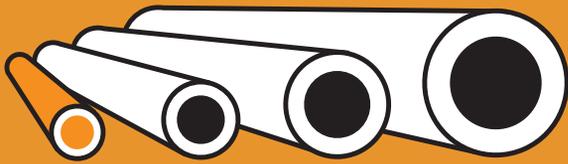


16 GAUGE


LIGHT DUTY

SUGGESTED USE

2-PRONG

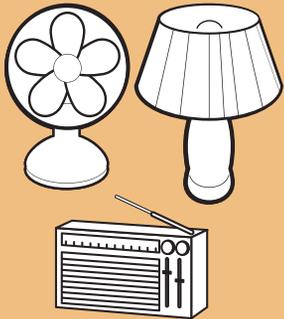

3-PRONG

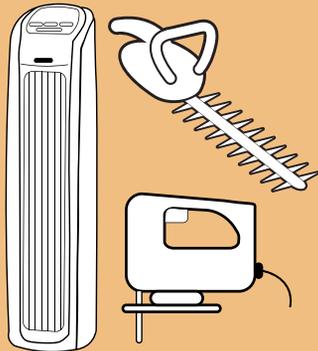

2-PRONG
FANS
SMALL APPLIANCES
STEREOS

3-PRONG
SPACE HEATERS
HEDGE TRIMMERS
JIG SAWS

AMP RATINGS

13
AMPS



13
AMPS

10
AMPS

25'

50'


100'

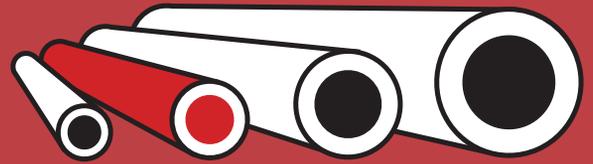

14 GAUGE

MEDIUM DUTY

SUGGESTED USE

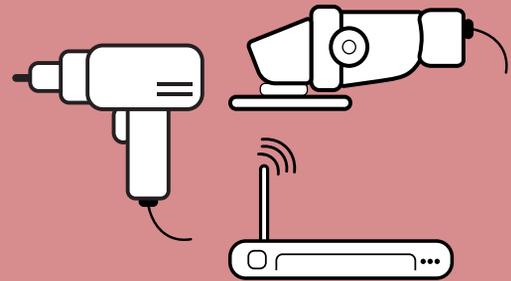

DRILLS
BELT SANDERS
ROUTERS

AMP RATINGS

15
AMPS


15
AMPS

13
AMPS

25'

50'


100'



THE GAUGE OF AN EXTENSION CORD DETERMINES HOW MUCH ELECTRICITY IT CAN CARRY




THE SMALLER THE NUMBER OF THE GAUGE, THE MORE ELECTRICITY IT CAN CARRY

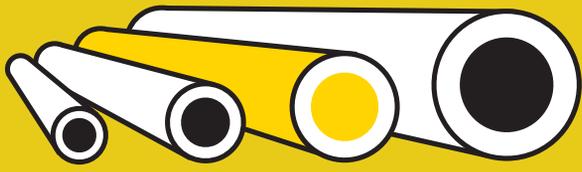

12 GAUGE

HEAVY DUTY

SUGGESTED USE

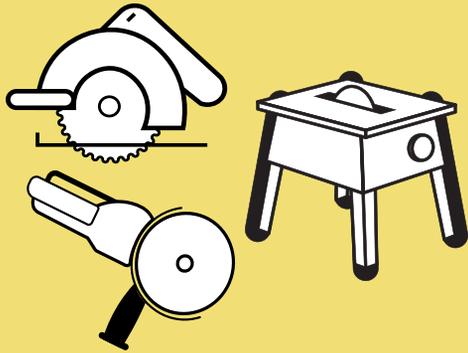

CIRCULAR SAWS
GRINDERS
TABLE SAWS

AMP RATINGS

15
AMPS


15
AMPS

15
AMPS

25'

50'


100'

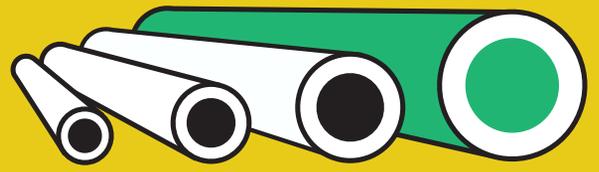

10 GAUGE

EXTRA HEAVY DUTY

SUGGESTED USE

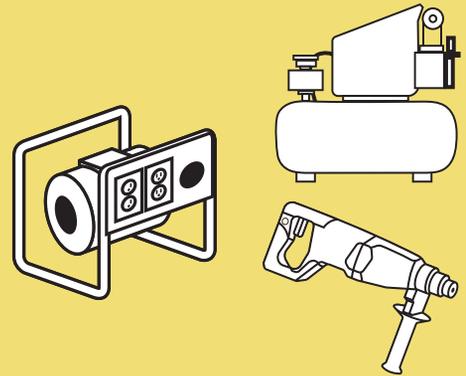

GENERATORS
COMPRESSORS
ROTARY HAMMERS

AMP RATINGS

20
AMPS


20
AMPS

20
AMPS

25'

50'

100'



USING A LARGE NUMBER GAUGE CORD ON A HIGH-POWER PRODUCT LIKE A SAW, COULD RESULT IN DAMAGE OF A SAW

DECODING JACKET TYPES

| | |
|------------|--|
| S | EXTRA HARD SERVICE 600V <i>(if not followed by J, V, or P)</i> |
| J | HARD SERVICE 300V |
| V | VACUUM CLEANER CORD <i>(also light duty cable)</i> |
| P | PARALLEL CORD <i>(also known as zip cord) - Always light duty</i> |
| E | THERMOPLASTIC ELASTOMER <i>(UL/NEC designation ONLY)</i> |
| O | OIL RESISTANT* |
| T | THERMOPLASTIC |
| W | OUTDOOR <i>Includes sunlight resistant jacket and wet location rated conductors (formerly "W-A")</i> |
| H | HEATER CABLE |
| VW1 | FLAME RETARDANT <i>(Vertical Specimen Flame Test)</i> |
| FT2 | FLAME RETARDANT <i>(Horizontal Specimen Flame Test)</i> |

*When only one "O" appears in a classification (i.e. SJEOW), only the outer jacket material is oil resistant. If two "O's" are in the classification (i.e. SEOWW), the insulation covering the conductors and the outer jacket insulation are both oil resistant.

NEMA CONFIGURATIONS



**NEMA
1-15P**



**NEMA
1-15R**



**NEMA
5-15P**



**NEMA
5-15R**



**NEMA
5-20P**



**NEMA
5-20R**



**NEMA
L5-20P**



**NEMA
L5-20R**



**NEMA
L14-20P**



**NEMA
L5-30P**



**NEMA
L5-30R**



**NEMA
L6-30P**



**NEMA
L6-30R**



**NEMA
6-50P**



**NEMA
6-50R**



**NEMA
14-50R**

NEMA connectors are power plugs and receptacles used in North America and other countries that follow the National Electrical Manufacturers Association's guidelines. NEMA wiring systems have current ratings ranging from 15 to 60 amps (A) and voltage ratings ranging from 125 to 600 volts (V). Non-interchangeable connectors are made up of different combinations of contact blade widths, shapes, orientations, and dimensions that are specific to each voltage, electric current carrying power, and grounding method.

MADE IN AMERICA CUSTOM EXTENSION CORD PROGRAM


SPEED CORDSET PROGRAM - INKJET PRINTED STANDARD CORDS:

Uses Standard 12AWG 3 Conductor SJTW/SJE00W Polar Solar Stocked Cords 50 Ft and 100 Ft Only
 4 Different Color Selections*: NEMA 5-15 Wiring Device Lit Ends Only



Min Run: 2,400 Ft, Max Run: 5,600 Ft
1-2 Week Lead time

* = SJE00W Jacket Only Available in Yellow

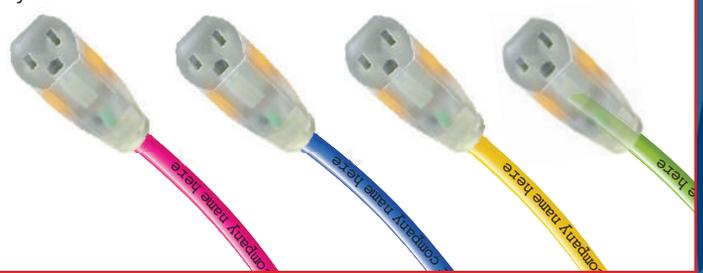


INKJET PRINTED SJTW STANDARD CORDS:

Uses Standard 12AWG 3 Conductor SJTW Cords Various Lengths Available
 4 Different Color Selections: NEMA 5-15 Wiring Device Type Only



Min Run: 5,000 Ft, Max Run of 10,000 Ft
6-8 Week Lead time

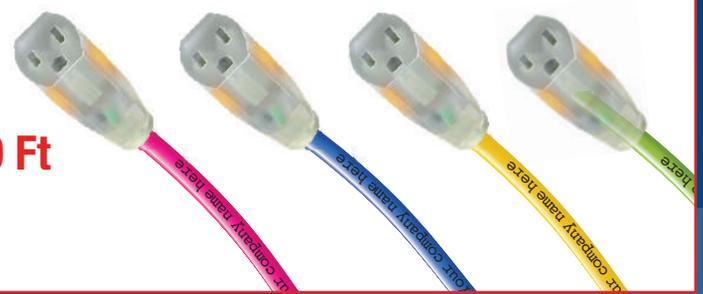

| INKJET PRINTED CUSTOM CORDS: | PRINT WHEEL OR INDENT CUSTOM CORDS*: | |
|--|--------------------------------------|--|
| 6-8 Week Lead time | 8-10 Week Lead time | |
| Min Run: 10,000 Ft Max Run: 50,000+** | | |
| Multiple Jacket Types, Devices, Custom Colors and Stripes | | |
| | | |
| <p>*Print Wheel and Indent custom cords require customer specific wheel for legend text **Above this may extend lead time</p> | | |



**WE'VE GOT IT
MADE IN AMERICA™**





OUTDOOR EXTENSION CORDS

Southwire Outdoor Extension Cords are perfect for a wide range of outdoor applications. These cords come in a wide range of colors to increase visibility and prevent jobsite loss.



OUTDOOR EXTENSION CORDS



STANDARD OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

SJTW, SJOW, SJTOW, STW

APPLICATION

GENERAL
OUTDOOR USE

TEMPERATURE RANGE

-40°F TO 140°F
(-40°C TO 60°C)



HEAVY DUTY OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

STW

APPLICATION

THICKER JACKET THAN
A STANDARD OUTDOOR
CORD FOR INCREASED
DURABILITY

TEMPERATURE RANGE

-40°F TO 140°F
(-40°C TO 60°C)



LOCKING & 20 AMPS



JACKET MATERIAL

PVC

JACKET TYPE

SJTW

APPLICATION

PLUGS & RECEPTACLE NEMA
CONFIGURATIONS ARE HIGH
AMPERAGE APPLICATIONS
TYPICAL OF TEMP POWER
& GENERATORS

TEMPERATURE RANGE

-40°F TO 140°F
(-40°C TO 60°C)



OUTDOOR CORDS

STANDARD OUTDOOR EXTENSION CORDS WITH LIT ENDS

2487SW8804



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA
5-15R**



**NEMA
5-15P**


SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|---------------------------|-------------|------------|------------|-----------|--------------------|
| 540836 | 14/3 | STW | 3' | 0.9 m | Red/Black | 15 | 12 |
| 541901 | | SJTW | 22' | 7 m | Red/Black | | 6 |
| 2487SW8804 | | | 25' | 7.6 m | Red | | 12 |
| 2488SW8804 | | | 50' | 15.2 m | Red | | 6 |
| 541902 | | | | | Red/Black | | 5 |
| 2489SW8804 | | | 100' | 30.5 m | Red | | 13 |
| 2577SW000H | 12/3 | | SJTW | 25' | 7.6 m | Neon Blue | 15 |
| 2577SW000X | | Neon Green | | | | | |
| 547703 | | Dark Green/Yellow | | | | | |
| 2577SW000A | | Neon Pink | | | | | |
| 2587SW8802 | | Yellow | | | | | |
| 2578SW000H | | Neon Blue | | | | 8 | |
| 2548SW0064 | | Neon Blue/Red | | | | | |
| 2548SW00HX | | Neon Blue/ Neon Green | | | | | |
| 2548SW0052 | | Dark Green/Yellow | | | | | |
| 2548SW0054 | | Lime Green/Red | | | | | |
| 2578SW000X | | Neon Green | | | | | |
| 2548SW003V | | Neon Orange/ Neon Blue | | | | | |
| 2578SW000A | | Neon Pink | | | | | |
| 2548SW0077 | | Neon Pink/ Lime Green | | | | | |
| 2548SW0041 | | Red/White | | | | | |
| 2588SW0002 | | Yellow | | | | | |
| 2548SW0022 | | Yellow/Purple | | | | | |

OUTDOOR CORDS | STANDARD

OUTDOOR CORDS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | | | |
|------------|-----------------|-------------|----------------|------------|---------------------------|------|--------------------|------|-----|--------|---------------|---|
| 2549SW0064 | 12/3 | SJTW | 100' | 30.5 m | Neon Blue/Red | 15 | 4 | | | | | |
| 2579SW000H | | | | | Neon Blue | | | | | | | |
| 2549SW0054 | | | | | Lime Green/Red | | | | | | | |
| 2579SW000X | | | | | Neon Green | | | | | | | |
| 2549SW0052 | | | | | Dark Green/Yellow | | | | | | | |
| 2549SW003V | | | | | Neon Orange/ Neon Blue | | | | | | | |
| 2549SW0077 | | | | | Neon Pink/ Lime Green | | | | | | | |
| 2579SW000A | | | | | Neon Pink | | | | | | | |
| 2549SW0041 | | | | | Red/White | | | | | | | |
| 2549SW0022 | | | | | Yellow/Purple | | | | | | | |
| 2589SW0002 | | | | | Yellow | | | | | | | |
| 2687SW0002 | | | | | 10/3 | | | SJTW | 25' | 7.6 m | Yellow | 6 |
| 26480064 | | | | | | | | | 50' | 15.2 m | Neon Blue/Red | 4 |
| 2688SW0002 | | | | | | | | | | | Yellow | |
| 26490054 | 100' | 30.5 m | Lime Green/Red | 3 | | | | | | | | |
| 2689SW0002 | | | Yellow | | | | | | | | | |

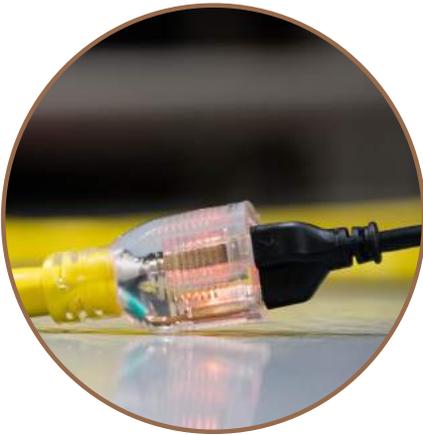

OUTDOOR CORDS | STANDARD

OUTDOOR CORDS

STANDARD OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

22078803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA
1-15R**



**NEMA
1-15P**



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|----|----|
| 22078803 | 16/2 | SJTW | 25' | 7.6 m | Orange | 13 | 12 | | |
| 22088803 | | | 50' | 15.2 m | | | 6 | | |
| 22098803 | | | 100' | 30.5 m | | | 6 | | |
| 2211SW8808 | 16/3 | SJOW | 10' | 3 m | Black | 13 | 24 | | |
| 2304SW8803 | | SJTW | 10' | 3 m | Orange | | 24 | | |
| 2306SW8808 | | | 15' | 4.6 m | Black | | 18 | | |
| 2305SW8803 | | | 15' | 4.6 m | Orange | | 18 | | |
| 2307SW8803 | | | 25' | 7.6 m | | | 12 | | |
| 2308SW8803 | | | 50' | 15.2 m | | | 12 | | |
| 2309SW8803 | | | 100' | 30.5 m | 10 | | 6 | | |
| 2407SW8804 | | 14/3 | SJTW | 25' | 7.6 m | | Red | 15 | 12 |
| 2408SW8804 | | | | 50' | 15.2 m | | | 6 | |
| 2409SW8804 | | | | 100' | 30.5 m | | | 13 | 6 |
| 517 | 10/3 | SJTW | 50' | 15.2 m | Orange | 15 | 2 | | |
| 518 | | | 100' | 30.5 m | | | 2 | | |



OUTDOOR CORDS | STANDARD

OUTDOOR CORDS

RED WHITE AND BLUE EXTENSION CORDS WITH LIT ENDS

2548SWUSA1



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill

 **WE'VE GOT IT
MADE IN AMERICA™**



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|----------------|------|--------------------|
| 2547SWUSA1 | 12/3 | SJTW | 25' | 7.6 m | Red/White/Blue | 15 | 12 |
| 2548SWUSA1 | | | 50' | 15.2 m | | | 8 |
| 2549SWUSA1 | | | 100' | 30.5 m | | | 4 |

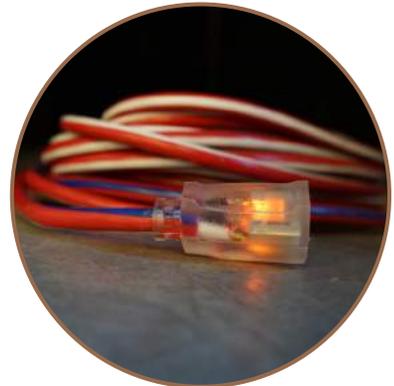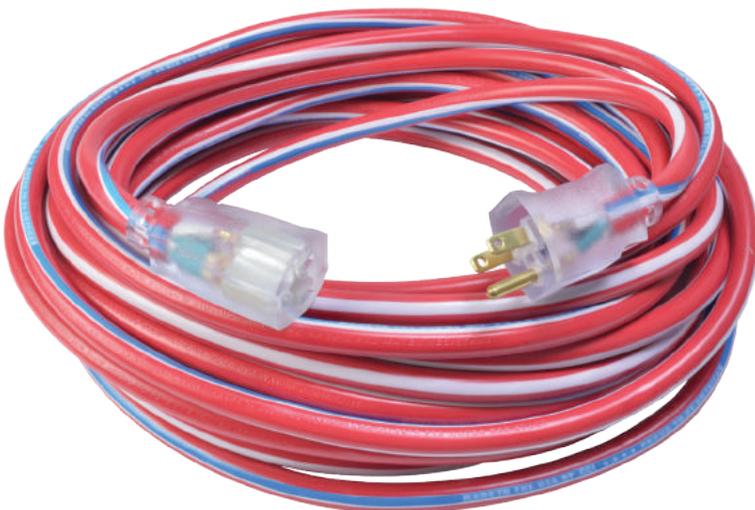

OUTDOOR CORDS | USA CORDS

OUTDOOR CORDS


TRITAP OUTDOOR EXTENSION CORDS WITH LIT ENDS

4189SW8802




Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 4187SW8802 | 12/3 | SJTW | 25' | 7.6 m | Yellow | 15 | 12 |
| 4188SW8802 | | | 50' | 15.2 m | | | 6 |
| 4189SW8802 | | | 100' | 30.5 m | | | 4 |
| 4388SW8802 | 10/3 | | 50' | 15.2 m | | | 4 |
| 4389SW8802 | | | 100' | 30.5 m | | | 3 |

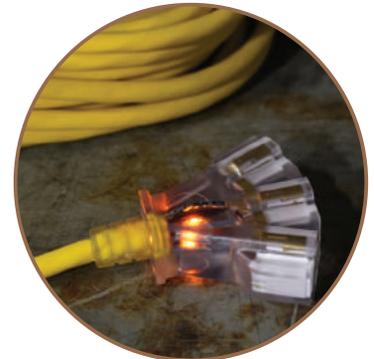

OUTDOOR CORDS | TRITAP CORDS

OUTDOOR CORDS

TRITAP OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

4004SW8803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA
5-15R**



**NEMA
5-15P**

** Black plugs*

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 4004SW8803 | 14/3 | SJTW | 6' | 1.8 m | Orange | 15 | 18 |
| 4217SW8804 | | | 25' | 7.6 m | Red | | 12 |
| 4218SW8804 | | | 50' | 15.2 m | | 13 | 6 |
| 4219SW8804 | | | 100' | 30.5 m | 6 | | |
| 4112SW8802 | 12/3 | STW | 2' | 0.6 m | Yellow | 15 | 12 |
| 19100002* | | SJTW | 25' | 7.6 m | | | 12 |




OUTDOOR CORDS | TRITAP CORDS

OUTDOOR CORDS

20A 5-20 EXTENSION CORD

26188802

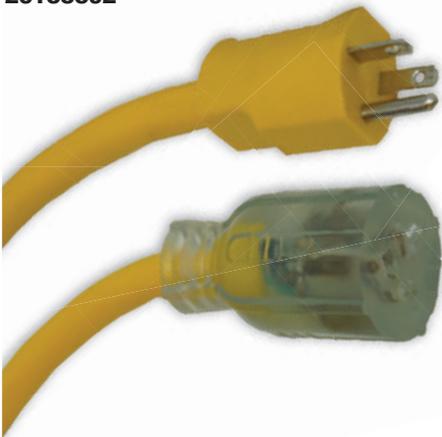

Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA
5-20P**



**NEMA
5-20R**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 26188802 | 10/3 | SJTOW | 50' | 15.2 m | Yellow | 20 | 2 |
| 65038701 | | | | | Black | | |



OUTDOOR CORDS | 20A 5-20

OUTDOOR CORDS

HEAVY DUTY OUTDOOR EXTENSION CORD

2457SW0003



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: table saw, heat gun, work light




**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 2457SW0003 | 14/3 | STW | 25' | 7.6 m | Orange | 15 | 6 |
| 2458SW0003 | | | 50' | 15.2 m | | | 4 |
| 2459SW0003 | | | 100' | 30.5 m | | | 3 |
| 2557SW0003 | 12/3 | | 25' | 7.6 m | | 15 | 6 |
| 2558SW0003 | | | 50' | 15.2 m | | | 4 |
| 2559SW0003 | | | 100' | 30.5 m | | | 3 |

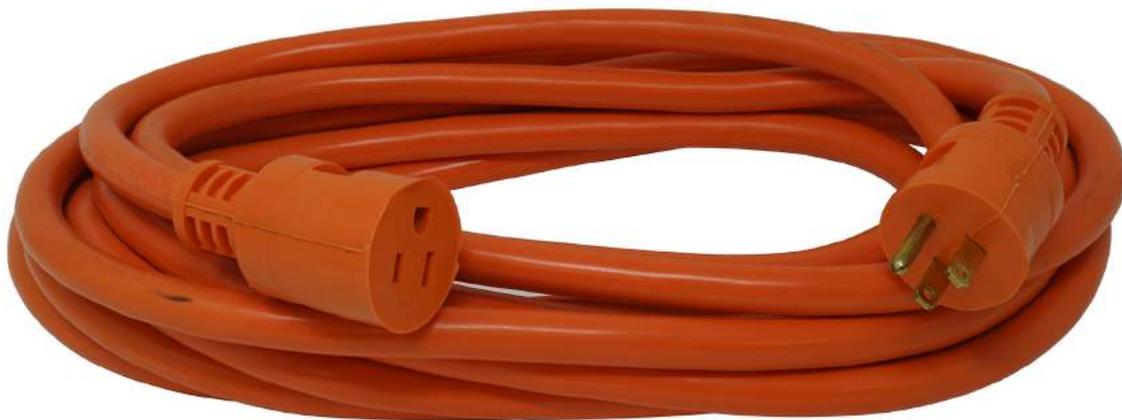

OUTDOOR CORDS | HEAVY DUTY

OUTDOOR CORDS

MULTI-OUTLET EXTENSION CORDS

90018802



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: table saw, heat gun, work light



**NEMA
5-15R**



**NEMA
5-15P**

** Black Plugs*

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | NUMBER OF OUTLETS | AMPS | CASE PACK QUANTITY |
|-----------|-----------------|-------------|-------------|------------|------------|-------------------|------|--------------------|
| 90028802* | 14/3 | STW | 6' | 1.8 m | Yellow | 3 | 15 | 6 |
| 3130 | | | 9' | 2.7 m | Black | 3 | | 4 |
| 90018802 | | | 25' | 7.6 m | Yellow | 3 | | 4 |
| 65038901 | | | 25' | 7.6 m | Black | 3 | | 2 |
| 65039101 | 12/3 | | 50' | 15.2 m | Black | 6 | | 2 |



OUTDOOR CORDS | MULTI-OUTLET

OUTDOOR CORDS

PUSH-LOCK EXTENSION CORDS

24388826



Southwire push-lock extension cords keep your tools plugged in while doing common yard work.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, leaf blower, hedge trimmer



NEMA
5-15R



NEMA
5-15P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|-----------------|-------------|-------------|------------|--------------|------|--------------------|
| 24388826 | 14/3 | SJTW | 50' | 15.2 m | Yellow/Blue | 15 | 4 |
| 24398826 | | | 100' | 30.5 m | | 13 | 3 |
| 25388828 | 12/3 | | 50' | 15.2 m | Yellow/Black | 15 | 4 |



OUTDOOR CORDS | PUSH-LOCK

COLD WEATHER EXTENSION CORDS

Southwire Cold Weather Extension Cords are best used in sub-zero temperatures. Our cords are designed with special compounds in the outer jacket that stays flexible and prevents damage in freezing cold weather. We offer varieties of bright colors that are easily seen in the snow.



COLD WEATHER CORDS



Typical extension cords become very hard to work with in the cold: the jackets will not flex and will hold their position, and in some cases, the jacket will become brittle and break, creating a loss in your your electrical connection or exposing copper and creating an unsafe working condition.

If you are working in a cold environment, you need the right cold weather extension cord for the job.



GOLD WEATHER

COLD WEATHER CORDS



COLD FLEX™



JACKET MATERIAL

TPE

JACKET TYPE

COLDFLEX SJTW

APPLICATION

**GENERAL COLD WEATHER
LESS FLEXIBLE IN EXTREME
LOW TEMPERATURES**

TEMPERATURE RANGE

**-58°F TO 140°F
(-50°C TO 60°C)**



POLAR/SOLAR®



JACKET MATERIAL

TPE

JACKET TYPE

SJE00W

APPLICATION

**COLD OR HOT
OUTDOOR
ENVIRONMENTS**

TEMPERATURE RANGE

-58°F TO 221°F
(-50°C TO 105°C)



POLAR/SOLAR® SUPREME



JACKET MATERIAL

PREMIUM TPE

JACKET TYPE

SJEOW

APPLICATION

**EXTREME COLD
OR HOT OUTDOOR
ENVIRONMENTS**

TEMPERATURE RANGE

-94°F TO 221°F
(-70°C TO 105°C)



COLD WEATHER CORDS

POLAR/SOLAR® SUPREME EXTENSION CORD

1439SW0061



Polar/Solar® Supreme extension cords are formulated to offer superior jobsite performance in extremely cold weather.

- Temperature rating of -94°F to 221°F (-70°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 1437SW0061 | 14/3 | SJE0W | 25' | 7.6 m | Blue/White | 15 | 12 |
| 1438SW0061 | | | 50' | 15.2 m | | 15 | 6 |
| 1439SW0061 | | | 100' | 30.5 m | | 13 | 6 |
| 1637SW0061 | 12/3 | | 25' | 7.6 m | | 15 | 12 |
| 1638SW0061 | | | 50' | 15.2 m | | 15 | 6 |
| 1639SW0061 | | | 100' | 30.5 m | | 15 | 4 |



COLD WEATHER CORDS | POLAR/SOLAR® SUPREME

COLD WEATHER CORDS


POLAR/SOLAR® EXTENSION CORD

1287SW0002



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



NEMA
5-15R

NEMA
5-15P

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 1287SW0002 | 16/3 | SJE0W | 25' | 7.6 m | Yellow | 13 | 12 |
| 1288SW0002 | | | 50' | 15.2 m | | | 12 |
| 1289SW0002 | | | 100' | 30.5 m | | | 6 |
| 14840002 | 14/3 | SJE0W | 10' | 3 m | Yellow | 15 | 24 |
| 1487SW0002 | | | 25' | 7.6 m | | | 12 |
| 1488SW0002 | | | 50' | 15.2 m | | | 12 |
| 1489SW0002 | | | 100' | 30.5 m | | | 6 |
| 1427SW0008 | 14/3 | SJE0W | 25' | 7.6 m | Black | 15 | 12 |
| 1428SW0008 | | | 50' | 15.2 m | | | 6 |
| 1429SW0008 | | | 100' | 30.5 m | | | 6 |
| 1687SW0002 | 12/3 | SJE0W | 25' | 7.6 m | Yellow | 15 | 12 |
| 1688SW0002 | | | 50' | 15.2 m | | | 6 |
| 1689SW0002 | | | 100' | 30.5 m | | | 4 |
| 1628SW0008 | 12/3 | SJE0W | 50' | 15.2 m | Black | 15 | 6 |
| 1629SW0008 | | | 100' | 30.5 m | | | 4 |
| 1787SW0002 | 10/3 | SJE0W | 25' | 7.6 m | Yellow | 15 | 6 |
| 1788SW0002 | | | 50' | 15.2 m | | | 4 |
| 1789SW0002 | | | 100' | 30.5 m | | | 3 |



COLD WEATHER CORDS | POLAR/SOLAR®

COLD WEATHER CORDS

POLAR/SOLAR® SJE00W TRIPTAP

3487SW0002



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 3487SW0002 | 12/3 | SJE00W | 25' | 7.6 m | Yellow | 15 | 12 |
| 3488SW0002 | | | 50' | 15.2 m | | | 6 |
| 3489SW0002 | | | 100' | 30.5 m | | | 4 |
| 3588SW0002 | 10/3 | | 50' | 15.2 m | | | 4 |
| 3589SW0002 | | | 100' | 30.5 m | | | 3 |



POLAR/SOLAR® SE00W TRIPTAP

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 3482SW8802 | 12/3 | SE00W | 2' | 0.61 m | Yellow | 15 | 15 |

COLD WEATHER CORDS | POLAR/SOLAR® TRIPTAP

COLD WEATHER CORDS

POLAR/SOLAR® SE00W HEAVY-DUTY OUTDOOR EXTENSION CORDS

1287SW0002



Polar/Solar® extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 1567SW0002 | 14/3 | SE00W | 25' | 7.6 m | Yellow | 15 | 6 |
| 1568SW0002 | | | 50' | 15.2 m | | | 4 |
| 1569SW0002 | | | 100' | 30.5 m | | | 3 |
| 1767SW0002 | 12/3 | | 25' | 7.6 m | | 15 | 6 |
| 1768SW0002 | | | 50' | 15.2 m | | | 4 |
| 1769SW0002 | | | 100' | 30.5 m | | | 3 |



COLD WEATHER CORDS | POLAR/SOLAR® HEAVY DUTY

COLD WEATHER CORDS

COLD FLEX™ OUTDOOR EXTENSION CORDS

2367SW8806



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS


| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|---------------|-------------|------------|------------|------|--------------------|
| 2367SW8806 | 16/3 | ColdFlex SJTW | 25' | 7.6 m | Blue | 13 | 12 |
| 2368SW8806 | | | 50' | 15.2 m | | 13 | 12 |
| 2436 | | | 100' | 30.5 m | | 10 | 6 |
| 2467SW8806 | 14/3 | | 25' | 7.6 m | | 15 | 6 |
| 2468SW8806 | | | 50' | 15.2 m | | 15 | 6 |
| 2469SW8806 | | | 100' | 30.5 m | | 13 | 3 |
| 2437 | 12/3 | | 25' | 7.6 m | | 15 | 12 |
| 2568SW0006 | | | 50' | 15.2 m | | 15 | 3 |
| 2569SW0006 | | | 100' | 30.5 m | | 15 | 4 |



COLD WEATHER CORDS


COLD FLEX™ TRITAP OUTDOOR EXTENSION CORDS

32688806

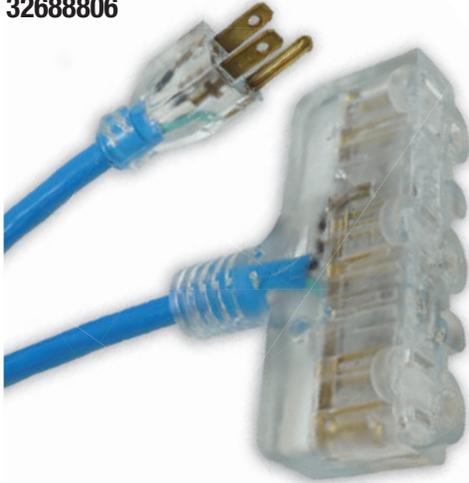

ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 32678806 | 14/3 | ColdFlex | 25' | 7.6 m | Blue | 15 | 6 |
| 32688806 | | SJTW | 50' | 15.2 | | | |



COLD WEATHER CORDS | COLD FLEX™

TWIST LOCK & GENERATOR EXTENSION CORDS

Southwire Twist Lock Extension Cords have a unique blade design that allows the cords to lock into receptacles or outlets with a simple twist action. We offer a vast selection of Generator Extension Cords with different amperage levels for different needs.



TWIST LOCK & GENERATOR

Having the right plug and receptacle is essential to getting the job done. Southwire has a broad assortment of cords and adapters to help you deliver power to where you need it as efficiently as possible.

COMMON GENERATOR NEMA CONFIGURATIONS




**NEMA
5-15R**



**NEMA
5-15P**



**NEMA
5-20P**



**NEMA
5-20R**




**NEMA
L5-20P**



**NEMA
L5-20R**




**NEMA
6-20P**



**NEMA
6-20R**



**NEMA
L14-20P**



**NEMA
L14-20R**



**NEMA
L5-30P**



**NEMA
L5-30R**



**NEMA
L14-30P**



**NEMA
L14-30R**



**NEMA
TT-30P**



**NEMA
TT-30R**



**NEMA
10-50P**




**NEMA
10-50R**

When considering what generator cables and adapters you need for a project, you want to avoid voltage drop from the generator. To do this, utilize as short a cable as possible, along with the largest conductor (smallest AWG) and a connector with as high amperage and voltage rating possible. For instance, you will get less power and greater voltage drop out of a generator using a 100' 15 amp 12/3 extension cord with 5-15 plugs compared to a 50' 20 amp 10/3 extension cord with a 5-20 plug.

TWIST LOCK & GENERATOR

L5-20 TWIST LOCK EXTENSION CORDS

9208SW8802

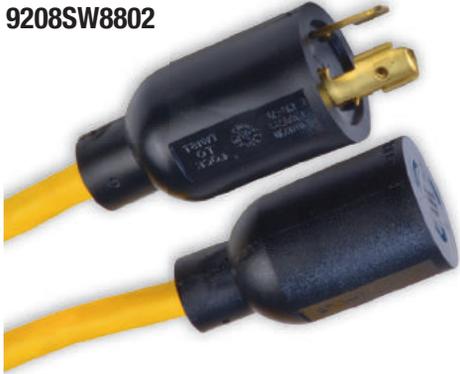

Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA L5-20P



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|---|---|
| 9208SW8802 | 12/3 | SJTW | 50' | 15.2 m | Yellow | 20 | 6 |  |  |
| 90288802 | | STW | | | | | 4 | | |
| 9209SW8802 | | SJTW | 100' | 30.5 m | | 15 | 4 | NEMA L5-20P | NEMA L5-20R |

L14-30 TWIST LOCK EXTENSION CORDS

65038801



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA L14-30P



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|---|---|
| 65172740 | 10/4 | STW | 10' | 3.05 m | Yellow | 30 | 6 |  |  |
| 65172840 | | | 20' | 6.1 m | | | 6 | | |
| 65038801 | | | 25' | 7.6 m | 2 | | | | |
| 65173140 | | | 50' | 15.24 m | 2 | | NEMA L14-30P | | |

TWIST LOCK & GENERATOR

GENERATOR ADAPTERS CONVERT TO 20A (5-20R)

19248802



Southwire generator adapters provide more usable receptacles during temporary power outages and on jobsites.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|---|---|
| 19158802 | 10/3 | STW | 3' | 0.9 m | Yellow | 15 | 4 |  NEMA L5-30P |  NEMA 5-20R Lighted |
| 19248802 | 12/4 | | | | | 20 | |  NEMA L14-20P | |
| 19348802 | 10/4 | | | | | 20 | |  NEMA L14-30P | |

TWIST LOCK & GENERATOR

TWIST LOCK ADAPTERS

9208SW8802



Southwire twist-to-lock adapters easily convert plugs and receptacles to fit your specific application.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|-----------------|-------------|-------------|------------|------------|-------|--------------------|---|--|
| 90208802 | 12/3 | STW | 9" | 0.2 m | Yellow | 15-20 | 10 |  NEMA 5-15P |  NEMA L5-20R |
| 90218802 | | | 9" | 0.2 m | | 15-20 | |  NEMA 5-15R | |
| 90228802 | | | 20" | 0.5 m | | 20 | |  NEMA L5-20R (x2) | |
| 90238802 | | | 2' | 0.6 m | | 20 | |  NEMA L5-20P |  NEMA L5-20R (x3) |
| 90848802 | | | 2' | 0.6 m | | 15 | | 6 |  NEMA 5-15R Lighted Tritap |
| 18640008 | 10/4 | SE00W | 10' | 3.05 m | Black | 50 | 4 |  NEMA 14-50P |  NEMA L14-30R |
| 18540008 | | | | 3.05 m | | 30 | 4 |  NEMA L14-30P |  NEMA L14-30R |

TWIST LOCK & GENERATOR | TWIST LOCK ADAPTERS

TWIST LOCK & GENERATOR

5-15 ADAPTERS

90188802



Southwire adapters transform your single outlet into multiple outlets.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, rv

SPECIFICATIONS

**Black plugs*

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|-----------|-----------------|-------------|-------------|------------|------------|------|--------------------|---|--|
| 90188802* | 12/3 | STW | 2' | 0.6 m | Yellow | 15 | 12 |  NEMA 5-15P |  NEMA 5-15R (x2) |
| 90198802* | | | | | | | | |  NEMA 5-15R (x3) |

TWIST LOCK & GENERATOR | GENERATOR ADAPTERS

SPECIALTY EXTENSION CORDS & POWER DELIVERY

Southwire specialty cords provide a broad assortment of cables to suit your needs. These cords are designed to resist damage against high- powered machinery while also being oil, solvent, and water resistant.



ROYAL™



JACKET MATERIAL

OIL-RESISTANT RUBBER

JACKET TYPE

SJ00W

APPLICATION

**HARSH GARAGE
& WELDING
ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 195°F
(-40°C TO 60°C)



AGRIPRO™



JACKET MATERIAL

OIL-RESISTANT VINYL

JACKET TYPE

SJE0W/SJ0W/SJTOW

APPLICATION

**HARSH GARAGE
& AGRICULTURAL
ENVIRONMENTS**

TEMPERATURE RANGE

-40°F TO 140°F
(-40°C TO 91°C)



SPECIALTY EXTENSION CORDS



ROYAL® WELDING CORDS

The flow of most devices that need power is fairly consistent. Welders, on the other hand, must change the flow to melt metals and connect work parts. Although these settings are regulated on the welder rather than at the power source, the extension cord that brings the power supply must be able to handle them. That's why voltage, gauge, length, and durability are all important considerations to make welding extension cord safe.

Southwire's Royal welding cords are specifically designed to resist damage from slag while also being oil, solvent, and water resistant.



SPECIALTY CORDS | ROYAL® CORDS

SPECIALTY EXTENSION CORDS

ROYAL® OUTDOOR EXTENSION CORDS

3677SW0008



Royal® extension cords are resistant to welding slag and are the most flexible extension cord on the market.

- Temperature rating of -40°F to 194°F (-40°C to 90°C)
- 125 voltage rating
- Abrasion, chemical, and oil resistant
- Common applications: welder, angle grinder, rotary hammer drill



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|---|
| 3687SW0002 | 12/3 | SJ00W | 25' | 12.19 m | Yellow | 15 | 12 | |
| 3676SW0008 | | | 40' | | Black | | 6 | |
| 3678SW0008 | | | 50' | Black | 6 | | | |
| 3688SW0002 | | | | Yellow | 3 | | | |
| 3680SW0008 | | | | 80' | 24.38 m | | Black | 4 |
| 3679SW0008 | | | 100' | 30.5 m | Black | | Yellow | 4 |
| 3689SW0002 | | | | | Yellow | | | |



SPECIALTY CORDS | ROYAL® CORDS

SPECIALTY EXTENSION CORDS

6-50 WELDER EXTENSION CORD

19178806



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA 6-50R/6-50P

SPECIFICATIONS


| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|--|--|
| 19178806 | 8/3 | STW | 25' | 7.6 m | Blue | 40 | 2 |  NEMA 6-50P |  NEMA 6-50R |
| 19228806 | | | 50' | 15.2 m | | | | | |

WELDING PLUG ADAPTER

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|--|---|
| 19408808 | 8/3 | STW | 1.5' | 0.46 m | Black | 40 | 12 |  NEMA 14-50P |  NEMA 6-50R |

SPECIALTY EXTENSION CORDS

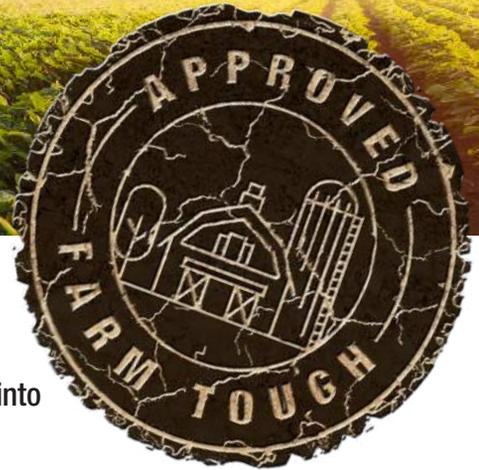

AGRIPRO™ CORDS

Oil Resistant Cords (SJTOW) are designed to withstand harsh conditions where fuel and fertilizers are often used. When basic SJTW cords come into contact with common chemicals, they can swell and become brittle.



SPECIALTY CORDS | AGRIPRO™

SPECIALTY EXTENSION CORDS

AGRIPRO™ OIL RESISTANT EXTENSION CORD

12770008



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|----------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 12270008 | 16/3 | SJEOW | 25' | 7.6 m | Black | 13 | 12 |
| 12280008 | | | 50' | 15.2 m | | | 12 |
| 64815701 | 14/3 | SJEOW | 25' | 7.6 m | | 15 | 12 |
| 64816001 | | | 50' | 15.2 m | | | 6 |
| 64816301 | | | 100' | 30.5 m | | 13 | 4 |
| 67729001 | 12/3 | SJTOW | 25' | 7.6 m | | 15 | 12 |
| 64816901 | | | 50' | 15.2 m | | | 6 |
| 64817201 | | | 100' | 30.5 m | | | 4 |
| 64817501 | 10/3 | SJEOW | 25' | 7.6 m | | | 6 |
| 64817801 | | | 50' | 15.2 m | | | 4 |
| 64818101 | | | 100' | 30.5 m | 3 | | |




SPECIALTY CORDS | AGRIPRO™

SPECIALTY EXTENSION CORDS


AGRIPRO™ 3-OUTLET OIL RESISTANT EXTENSION CORD

54533501

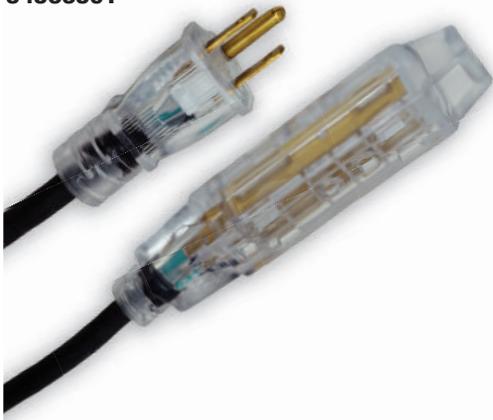

Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



* Lighted Banana Receptacle
** Rated for Indoor Use

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|-------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 54533501 ** | 14/3 | SJOW | 15' | 4.6 m | Black | 15 | 18 |


AGRIPRO™ TRITAP OIL RESISTANT EXTENSION CORD

2451



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|---------|-----------------|-----------|-------------|------------|------------|------|--------------------|
| 2451 | 14/3 | SJTOW | 25' | 7.6M | Black | 15 | 12 |

SPECIALTY CORDS | AGRIPRO™

RANGE · DRYER · APPLIANCE · REPLACEMENT CORDS

Southwire offers a variety of in-home replacement cords providing multiple options for different plug configurations, and strain relief clamps help prevent cord damage.



RANGE · DRYER · APPLIANCE

RANGE AND DRYER CORDS

9014SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125/250 voltage rating

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | NUMBERS OF WIRES | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG |
|------------|-----------------|-------------|------------------|-------------|------------|------------|------|--------------------|-------------|
| 9014SW8809 | 6/2-8/1 | SRDT Flat | 3 | 4' | 1.2 m | Gray | 50 | 6 | NEMA 10-50P |
| 9016SW8809 | | | 3 | 6' | 1.8 m | | | 6 | |
| 9044SW8808 | 6/2-8/2 | SDRT Round | 4 | 4' | 1.2 m | Black | 40 | 6 | NEMA 14-50P |
| 9046SW8808 | | | 4 | 6' | 1.8 m | | | 6 | |
| 544094 | 8/2-10/2 | DRT | 4 | 5' | 1.5 m | Black | 30 | 8 | NEMA 14-30P |
| 544147 | | | 4 | 5' | | | | 15 | |
| 544120 | 10/2 | DRT | 3 | 5' | 1.5 m | Black | 40 | 8 | NEMA 14-50P |
| 544150 | | | 3 | 5' | | | | 15 | |
| 9124SW8809 | 10/3 | SDRT Flat | 3 | 4' | 1.2 m | Gray | 30 | 6 | NEMA 10-30P |
| 9126SW8809 | | | 3 | 6' | 1.8 m | | | 6 | |
| 9154SW8808 | 10/4 | SDRT Round | 4 | 4' | 1.2 m | Black | 30 | 6 | NEMA 14-30P |
| 9156SW8808 | | | 4 | 6' | 1.8 m | | | 6 | |

ELECTRIC OUTLET GAS RANGE ADAPTER 250V TO 125V

9042SW8801



- Converts a 220V Outlet to 120V
- Commonly used when installing an electric range where a gas range previously worked
- Helps avoid re-wiring an outlet in a home

| STOCK # | COLOR | AMPS | CASE PACK QUANTITY | NEMA PLUG | NEMA RECEPTACLE |
|------------|------------------------------|------|--------------------|-------------|-----------------|
| 9042SW8801 | White with Black Pull Handle | 15 | 4 | NEMA 14-50P | NEMA 5-15R |

RANGE & DRYER | CORDS & ADAPTER

RANGE · DRYER · APPLIANCE

GARAGE & WORKSHOP REPLACEMENT POWER SUPPLY CORDS

9853SW0008



- Temperature rating of:
 - SJEOW -58°F to 221°F (-50°C to 105°C)
 - SJT -40°F to 140°F (-40°C to 60°C)
 - SE00W -58°F to 221°F (-50C to 105°C)
- 125 voltage rating
- Common applications: electric trimmer, electric chainsaw, air compressor



NEMA 5-15P ***NEMA 1-15P**

*2 Prong

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|-------------|-----------------|-------------|-------------|------------|------------|-------|--------------------|
| 9853SW0008* | 16/2 | SJEOW | 6' | 1.8 m | Black | 13 | 50 |
| 9854SW0008* | | | 9' | 2.7 m | | | 50 |
| 98388808 | 16/3 | SJT | 2.5' | 0.7 m | | | 100 |
| 9855SW0008 | | SJEOW | 6' | 1.8 m | | | 50 |
| 9856SW0008 | | | 9' | 2.7 m | | | 50 |
| 9857SW0008 | | | 6' | 1.8 m | | 25 | |
| 9858SW0008 | 14/3 | SJEOW | 9' | 2.7 m | | 25 | |
| 90110008 | 12/3 | | SE00W | 2' | | 0.6 m | 50 |
| 90120008 | | 2' | | 0.6 m | | 50 | |

INDOOR ROUND REPLACEMENT POWER SUPPLY CORDS

9702SW8808



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: vacuum, electric drill, work light



NEMA 5-15P ***NEMA 1-15P**

*2 Prong

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|-------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 9702SW8808* | 16/2 | SJTW | 6' | 1.8 m | Black | 13 | 25 |
| 9703SW8808 | 16/3 | | 3' | 0.9 m | | | |
| 9706SW8808 | | | 6' | 1.8 m | | | |
| 9709SW8808 | | | 9' | 2.7 m | | | |
| 9716SW8808 | 14/3 | | 6' | 1.8 m | | | |
| 9719SW8808 | | | 9' | 2.7 m | | | |

WORKSHOP | POWER SUPPLY

RANGE · DRYER · APPLIANCE

INDOOR FLAT REPLACEMENT POWER SUPPLY CORDS

9723SW8809



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage rating
- Common applications: microwave, refrigerator, dehumidifier



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JAKCET TYPE | NUMBERS OF WIRES | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY | | | | |
|------------|-----------------|-------------|------------------|-------------|------------|------------|------|--------------------|----|-------|-------|----|
| 9723SW8809 | 16/3 | SPT-3 | Right Angle | 3' | 0.9 m | Gray | 13 | 25 | | | | |
| 9733SW8809 | | | Straight | 3' | 0.9 m | | | | | | | |
| 9724SW8809 | | | Right Angle | 4' | 1.2 m | | | | | | | |
| 9734SW8809 | | | Straight | 4' | 1.2 m | | | | | | | |
| 9726SW8809 | | | Right Angle | 6' | 1.8 m | | | | | | | |
| 9736SW8809 | | | Straight | 6' | 1.8 m | | | | | | | |
| 9743SW8823 | | | 14/3 | SPT-3 | Straight | | | | 3' | 0.9 m | Beige | 15 |
| 9743SW09 | | | | | Straight | | | | 3' | 0.9 m | Gray | |
| 9746SW8823 | Straight | 6' | | | 1.8 m | Beige | | | | | | |
| 98700009 | Right Angle | 6' | | | 1.8 m | Beige | | | | | | |

APPLIANCE | POWER SUPPLY

RANGE · DRYER · APPLIANCE

125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3531SW3323



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- Common applications: air conditioner, space heater, refrigerator



**NEMA
5-15R**



**NEMA
5-15P**

SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 3531SW3323 | 14/3 | SPT-3 | 3' | 0.9 m | Beige | 15 | 36 |
| 3532SW3323 | | | 6' | 1.8 m | Beige | | 24 |
| 3533SW3323 | | | 9' | 2.7 m | Beige | | 15 |
| 3535SW3323 | | | 12' | 3.7 m | Beige | | 12 |
| 3536SW3323 | | | 15' | 4.6 m | Beige | | 12 |

250V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3537SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- Common applications: air conditioner, space heater, refrigerator



**NEMA
6-20P**



**NEMA
6-20R**


SPECIFICATIONS

| STOCK # | GAUGE CONDUCTOR | JACKET TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | AMPS | CASE PACK QUANTITY |
|------------|-----------------|-------------|-------------|------------|------------|------|--------------------|
| 3537SW8809 | 12/3 | SPT-3 | 9' | 2.7 m | Gray | 20 | 18 |

APPLIANCE | REPLACEMENT

CORD MANAGEMENT & REELS

Southwire cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free.

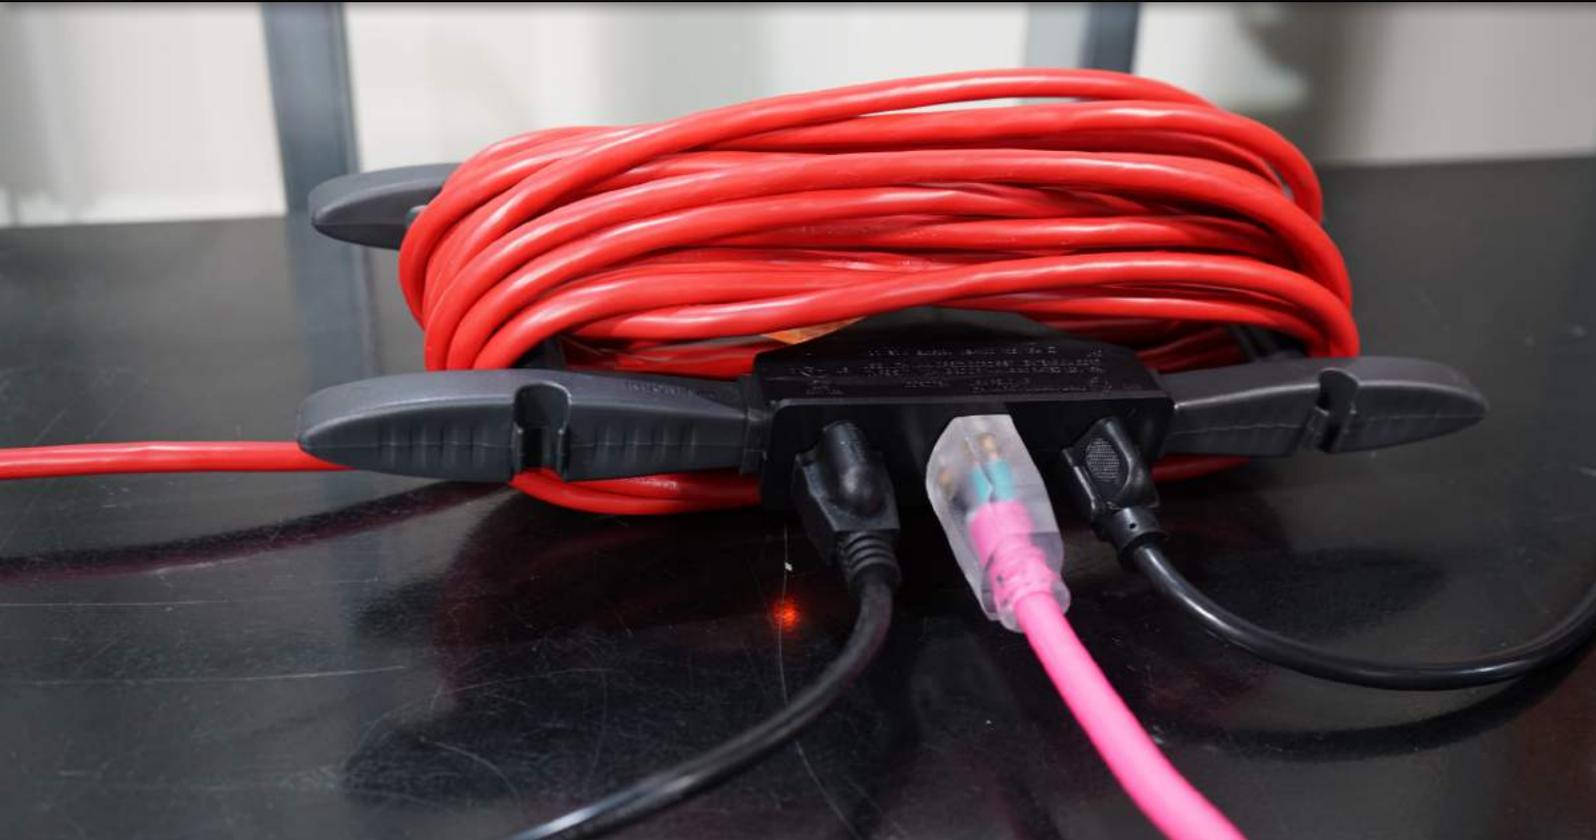

CORD MANAGEMENT

CORD ORGANIZATION CORD STORAGE WRAPS

64827501



SPECIFICATIONS

| STOCK # | DESCRIPTION | HOLDS | COLOR | CASE PACK QUANTITY |
|----------|--|-------------------------|--------|--------------------|
| 64827501 | Resin Cord Wrap With Stand | 100' of 14/3 Gauge Cord | Yellow | 10 |
| 2803 | Black, Mountable H-Frame Extension Cord Reel | 100' of 16/3 gauge cord | Black | 12 |
| 64827801 | Resin Cord Wrap With Integrated Tritap Adapter | 50' of 14/3 Gauge Cord | Black | 3 |
| E101 | Yellow, Mountable Cord Storage Extension Cord Reel | 100' of 16/3 gauge cord | Yellow | 24 |
| 502805 | Black Cord Caddy H-Rack Tray Pack | 50' of 14/3 gauge cord | Black | 24 |

CORD STORAGE REEL

E-230



SPECIFICATIONS

**with metal stand*

| STOCK # | DESCRIPTION | HOLDS | COLOR | CASE PACK QUANTITY |
|----------|---|---|--------------|--------------------|
| E102 | Extension Cord Storage Reel | 150' Of 16/3, 125' Of 14/3, And 75' Of 12/3 | Red/Black | 8 |
| 22849* | Extension Cord Reel With Metal Stand | Holds 100' Of 14/3 Gauge Cords | Black | 6 |
| 64827201 | Black, Extension Cord Storage Wheel | 150' of 16/3 , 125' of 14/3, 75' of 12/3 | Black | 8 |
| E103 | Extension Cord Storage Wheel | Holds 125' Of 14/3 Gauge Cord | Red/Black | 4 |
| E230* | Resin Reel With Metal Stand And Four Grounded Outlets | 50' of 12/3 Gauge Cord | Black/Yellow | 4 |
| 547702 | Extension Cord Storage Wheel | 150' of 16/3 Gauge Cord | Black | 8 |

CORD MANAGEMENT

CORD REELS

E-235



E238



E2801



SPECIFICATIONS

| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | CASE PACK QUANTITY |
|---------|--|-----------------|-----------|-------------|------------|--------------------|--------------------|
| E235 | Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker | 14/3 | SJTW | 50' | 15.2 m | Red/Black/Yellow | 2 |
| E238 | Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker | 12/3 | SJTW | 50' | 15.2 m | Green/Black/Yellow | 2 |
| 2801 | Portable Extension Cord Reel Power Station, 4 Grounded Outlets | 16/3 | SJT | 25' | 7.6 m | Black/Yellow | 3 |
| 4907 | Extension cord Reel with 4 Grounded Outlets | 16/3 | SJTW | 25' | 7.6 m | Black/Yellow | 4 |
| 545794 | Cord Caddy Self-Storing Extension Cord with 4 Grounded Outlets | 16/3 | SJTW | 32.81' | 10 m | Orange | 6 |

CORD MANAGEMENT

RETRACTABLE CORD REELS WITH LIGHTED TRITAP

E315



E215



48006SW



SPECIFICATIONS

*Black Tri-Tap ^Banana Plug

| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | OUTLETS | AMPS | CASE PACK QUANTITY |
|------------|--|-----------------|-----------|-------------|------------|--------------|---------|------|--------------------|
| E315 | Retractable Extension Cord Reel | 16/3 | SVT | 20' | 6.1 m | Black/Yellow | 3 | 13 | 4 |
| E215^ | Metal Retractable Extension Cord Reel With Lighted End | 16/3 | SJT | 30' | 9.1 m | Silver/Black | 3 | 13 | 2 |
| 48006SW* | Metal Retractable Extension Cord Reel | 14/3 | SJTW | 30' | 9.1 m | Red/Black | 3 | 15 | 3 |
| 48208802SW | Retractable Extension Cord Reel With Lighted End | 12/3 | SJTW | 50' | 15.2 m | Black/Yellow | 3 | 13 | 1 |


RETRACTABLE CORD REEL WITH LOCKING PLUG

48004



SPECIFICATIONS

| STOCK # | DESCRIPTION | GAUGE CONDUCTOR | WIRE TYPE | LENGTH (FT) | LENGTH (M) | CORD COLOR | OUTLETS | AMPS | CASE PACK QUANTITY |
|---------|--|-----------------|-----------|-------------|------------|------------|---------|------|--------------------|
| 48004 | Metal Retractable Extension Cord Wheel With Locking Plug | 14/3 | SJTW | 30' | 9.1 m | Red/Black | 1 | 15 | 3 |

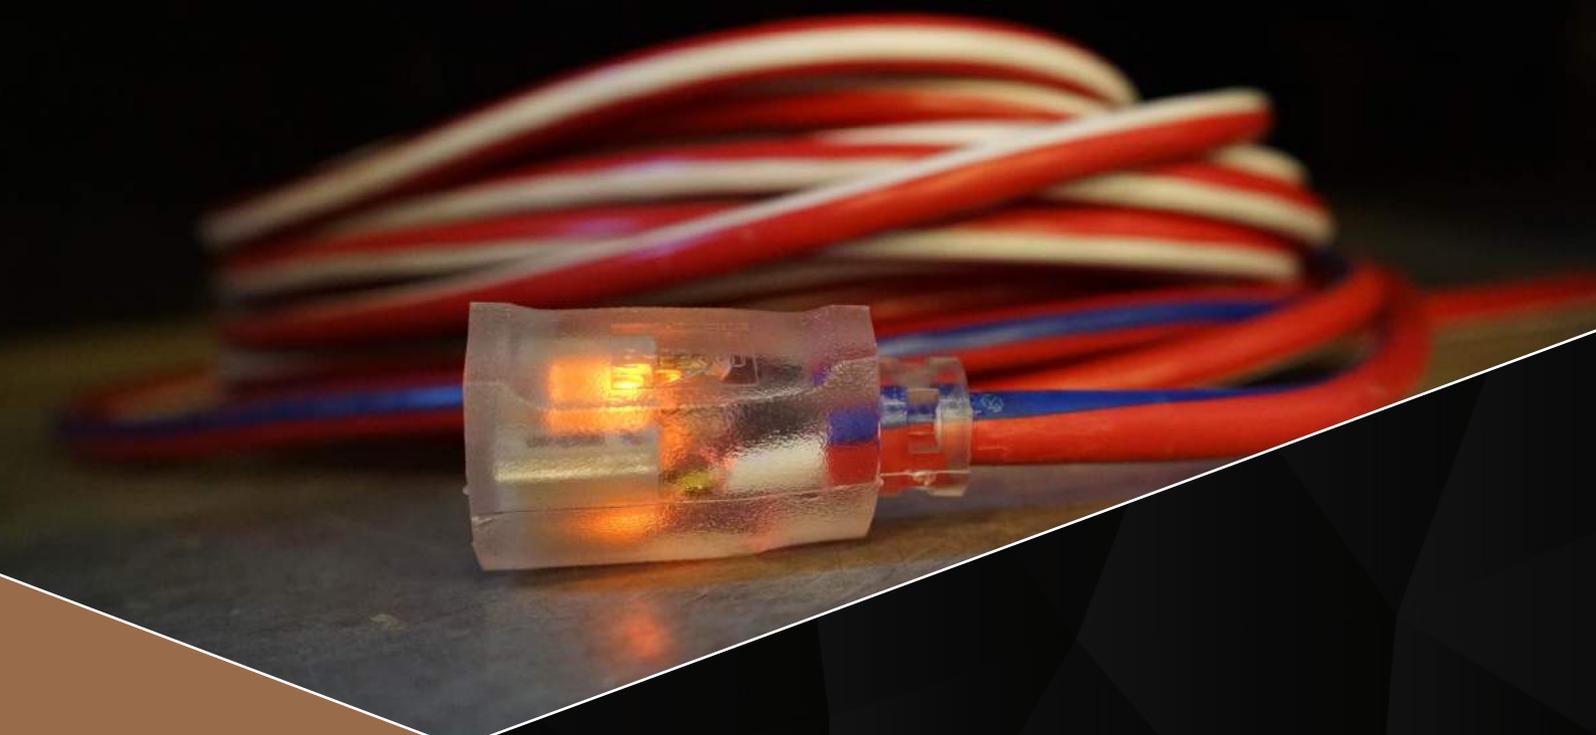

Southwire™

CORD SOLUTIONS CATALOG

get social with us:



[/SOUTHWIRETOOLS](#)



[/SOUTHWIRE-COMPANY](#)



[@SOUTHWIRETOOLS](#)



[@SOUTHWIRE](#)



SCAN TO LEARN MORE

WWW.SOUTHWIRE.COM | 1-855-SWTTOOLS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.
Any other TM/®- Trademark or Registered Trademark of Southwire Company.